

MAIN MATRIX CPU DMX-25632



**Max.256 CAMERA INPUT
32 MONITOR OUT**




FEATURES

- 64 Camera (Extended up to 256 Cameras), 32 Monitors can be controlled
- 16Characters Korean, 32 English letters supported
- Up to 16pcs of Video Card (DVC-6432) can be inserted (2 Video Outputs for each DVC-6432)
- 3 Video Input Extension Bay Unit (DME-6432) can be connected, Max. 256 Cameras controlled
- Built-in I/D, Time, Generator per each Video Card (DVC-6432)
- Anti-Noise synchronization creates smooth conversion of video arising when converting the video
- Can be operated by DCK-255, DCK-500 and up to 8 sub-keyboards can be connected
- Built-in Alarm Interlocking device (Max. 512 sensors can be input when using DAR-080, DAR-241)
- Direct connection with PC or DVR with built-in RS-232 Port (DGM-2002 can be connected)

SPECIFICATIONS

MODEL	DMX-25632
System	I/O card slot 16 EA Keyboard interface Rs -232 interface CCTV receiver control interface Alarm interface
Function	256 by 32 video matrix control 256 CCTV receiver control 8 Sub keyboard control Protecting from noise
Display	Korean 16characters, 32English letters Data/Time Display Alarm, Status Display
Camera Input	64EA(BNC Connector)
Monitor Output	32EA(BNC Connector)
Data Backup	Data/Time Display
Communication	CCTV Receiver-9600, N, 8, 1 Sub Keyboard-9000, N, 8, 1 Rs-232C-9600, N, 8, 1 ARU-1200, E, 8, 1
Operation Temp	0°C ~ +40°C
Weight	Approx. 3.5Kg
Dimensions	430(W)mm × 265(H)mm × 350(D)mm

DIMENSIONS

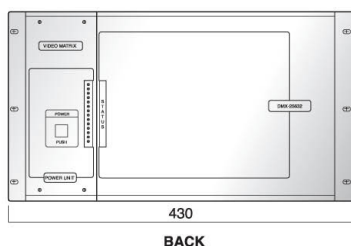

(UNIT : mm)