


Megapixel IP Camera

V6 Series Full HD • Real-time



Dimension

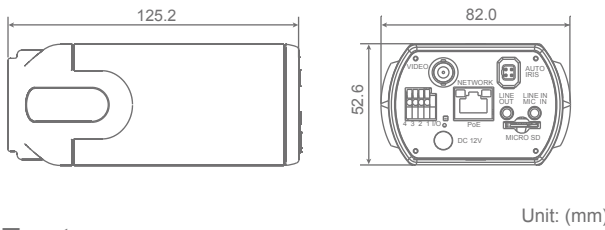


Features

- Progressive Scan CMOS Sensor
- NEW** • Full HD 1080p / HD 720p real-time at dual streaming
- NEW** • H.264 and MJPEG compression
- Motion Detection
- Privacy Masks
- Day/Night (ICR)*
- Auto Iris Lens support*
- NEW** • Micro SD support*
- NEW** • BNC analog output*
- **ONVIF** support

V1 Series Full HD • Real-time • Compact



Dimension

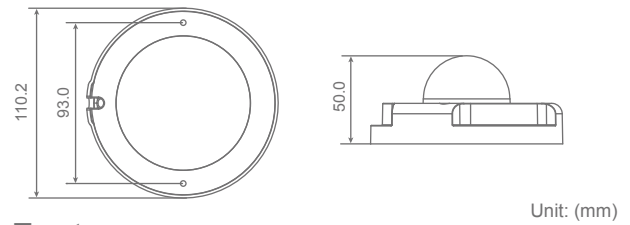

Features

- Progressive Scan CMOS Sensor
- NEW** • Full HD 1080p / HD 720p real-time at dual streaming
- H.264 and MJPEG compression
- NEW** • f = 4 mm, F1.5
- Power over Ethernet (802.3af)
- Motion Detection
- Privacy Masks
- Weatherproof Dongle Cable*
- Weatherproof (IP66 international)
- Micro SD support*
- NEW** • Security Torx against tampering
- **ONVIF** support


Note: Items marked with an asterisk (*) are optional

V2 Series

Full HD • Real-time • Vandal Proof



Dimension

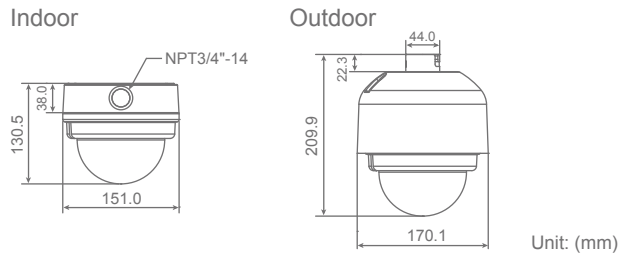

Features

- Progressive Scan CMOS Sensor
- NEW** • Full HD 1080p / HD 720p real-time at dual streaming
- H.264 and MJPEG compression
- NEW** • Remote Zoom & Focus (Motorized Lens)*
- Motion Detection
- Privacy Masks
- Day/Night (ICR)
- NEW** • IR LED Module (effective distance: 20m)*
- NEW** • Micro SD support
- BNC analog output
- Weatherproof (IP66 international)
- NEW** • Vandal proof dome cover
- Sun Shield & Outdoor Mounting Kit
- **ONVIF** support


Note: Items marked with an asterisk (*) are optional

V3 Series

Full HD • Real-time • Vari-focal



Dimension

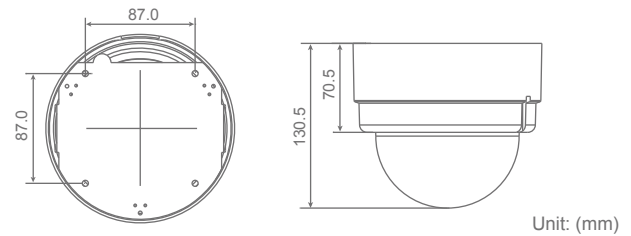


Features

- Progressive Scan CMOS Sensor
- NEW** • Full HD 1080p / HD 720p real-time at dual streaming
- H.264 and MJPEG compression
- Remote Zoom & Focus (Motorized Lens)*
- NEW** • Lightweight dome cover
- Detachable modular design
- NEW** • 3-Axis position adjustment
- Motion Detection
- Privacy Masks
- Day/Night (ICR)
- NEW** • IR LED Module (effective distance: 20m)*
- Micro SD support
- **ONVIF** support

Megapixel IP Camera

Value Chart

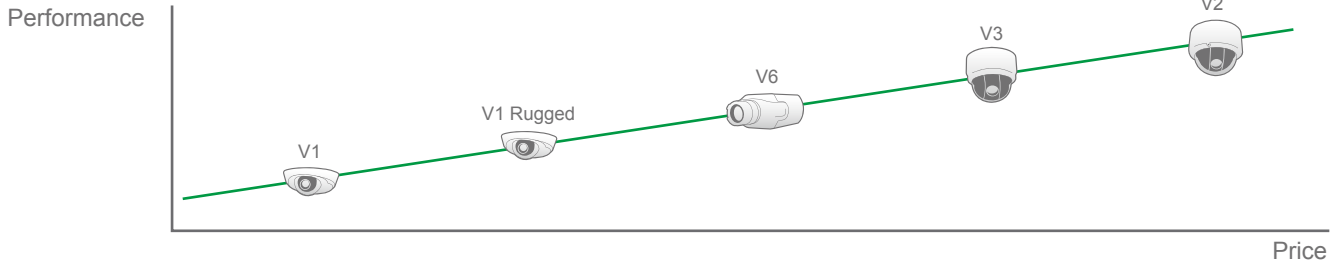

Comparison Chart

Item	V1	V1 Rugged	V6	V3	V2
CMOS	●	●	●	●	●
Lens	fixed focal	fixed focal	C/CS mount	Manual VF	Motorized VF
ICR	-	-	○	○	●
Built-in Mic	○	-	-	-	-
Audio in	●	-	●	●	●
Audio out	-	-	●	●	●
Alarm	-	-	●	●	●
BNC	-	-	○	●	●
Micro SD	○	○	○	●	●
Weatherproof (IP66)	-	●	-	-	●

● Support ○ Optional - Not support

Specification

Item	Full HD Real-time	Full HD
Camera		
Image Sensor	1/2.7" Progressive CMOS	1/2.7" Progressive CMOS
Picture Elements	1920(H) × 1080(V)	1920(H) × 1080(V)
Shutter Speed	1~1/10000 sec.	1~1/10000 sec.
White Balance	Manual/ATW (1500 ~ 15000K)	
Digital Zoom	Support	
Operation		
Video Compression	H.264 /MJPEG	
Video Streaming	Simultaneously, H.264 + H.264 Simultaneously, H.264 + MJPEG Simultaneously, MJPEG + BNC	
Resolution	H.264: Full HD 1080p/HD 720p/D1/CIF MJPEG: Full HD 1080p/HD 720p/D1/CIF	
Frame Rate	H.264: 1080p 25/30fps MJPEG: 1080p 25/30fps	H.264: 720p 25/30fps MJPEG: 720p 25/30fps
Image Setting	Exposure, White Balance, Brightness, Sharpness, Contrast, Saturation, Hue, Image rotation, Motion detection, Privacy Mask	
Audio	Line Out, Line In/Mic In	
Alarm	Input	5V 10kΩ pull up
	Output	Photo relay output 300V DC/AC
Event Notification	HTTP, FTP, SMTP	
Multiple Languages	English, French, German, Italian, Simplified Chinese	
Network		
Interface	RJ-45, 10/100 Mbps Ethernet	
Protocol	IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS, ONVIF	
Password Levels	User and Administrator	
Security	HTTPS, IP Filter	
Internet Browser	Internet Explorer (6.0+), Chrome, FireFox	
User Account	20	
General		
Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)	
	Humidity: 10% to 90%, Non-condensing	
Power Source	DC 12V / AC 24V / PoE	
Power Consumption	4W+	
Certificate	CE, FCC, RoHS compliant	

Product specification and availability subject to change without notice. Certain product names mentioned herein may be trade names and / or registered trademarks of their companies.