




Public Address & Communication System

ITC T-6212(A)

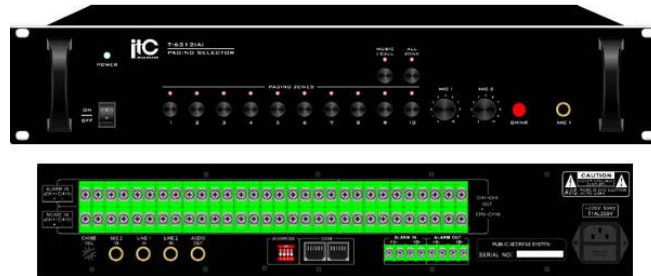

Descriptions

- Built-in 10 groups power zones, can be expanded to 300 Zones
- With memory function when power off, can realize the restoration after electricity be turn on
- 10 groups background music amplifier + 10 groups alarm signal amplifier input interface to achieve the access of any number amplifiers (1-10 Units)
- Each groups largest controllable power is 500W, the total controllable power is 5000W
- Two-color zones status display lights, accurate indicate music, paging or alarm status
- Music zones player control function, to achieve the music broadcast to any zones
- The local and remote (1km) zone paging function, to achieve zone division convenient and flexible
- Built in alarm triggering interface and neighbor floor alarm to achieve smart alarm functions of all zone, single zone, neighbor floor and so on
- Built-in pre-amplifier with two priority functions, two microphone inputs, and two line inputs
- Built-in chime with 4 tones.

Optional

- Panel with/without handhold

Specifications

Model	T-6212(A)
Input	MIC1, 2: 600ohms, 1.8mV, unbalanced Line1, 2 10Kohms, 200mV, unbalanced
Output	80dB
Frequency Response	MIC: 100Hz-15KHz; Line: 30Hz-18KHz
Crosstalk	MIC input: 80dB Line input: 90 dB
Controls	MIC1, 2 gain controls, 10 channel selectors, chime button, power switch
Indicators	Power LED, 10 paging channel LEDs
Protection	AC fuse, 1A
Power Requirements	~110V/60Hz or ~230V/50Hz 24V DC(optional)
Power Consumption	40W
Communication Protocol	RS422
Communication Input	RJ45
Communication Speed	4800bps
Weight	4.6 kg
Dimensions(W x D x H)	484×350×88mm
Finish	Panel: aluminum plate, black or golden (optional)