




## Public Address & Communication System

### Indoor

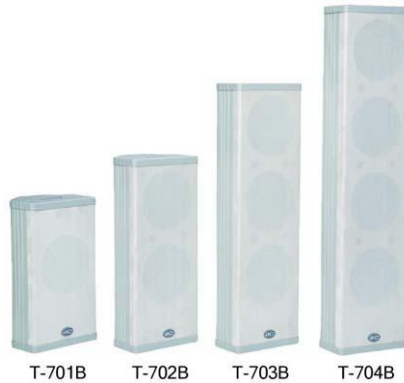

### Descriptions

Model	T-701B	T-702B	T-703B	T-704B
Power Taps @100V	10W, 5W	20W, 10W	30W, 15W	40W, 20W
Power Taps @70V	5W, 2.5W	10W, 5W	15W, 7.5W	20W, 10W
Impedance	Com / 1KΩ/ 2KΩ	Com/ 500Ω/ 1KΩ	Com/ 330Ω/ 670Ω	Com/ 250Ω/ 500Ω
SPL(1W/1M)	88dB ±3dB	90dB ±3dB	91dB ±3dB	93dB ±3dB
Max. SPL (Rated W/1M)	98dB	103dB	106dB	109dB
Frequency Response (-10dB)	200-16KHz	200-16KHz	200-16KHz	200-16KHz
Finish	Body: Aluminum, Gray Cover: ABS, Gray	Body: Aluminum, Gray Cover: ABS, Gray	Body: Aluminum, Gray Cover: ABS, Gray	Body: Aluminum, Gray Cover: ABS, Gray
Speaker Driver	4" ×1	4" ×2	4" ×3	4" ×4
Dimensions	140×105×255mm	140×105×328mm	140×105×458mm	140×105×581mm
Weight	1.8kg	2.6kg	3.5kg	4.4kg
Mounting	With mounting bracket fixed by screw			

### Specifications

