Moon 512
Moving Light Controller

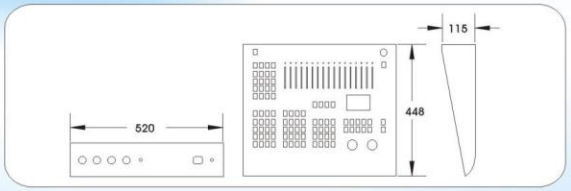

MOON512

Technology Parameter

- DMX512/1990 Standard,total 512 DMX channels.
- Control 32–64 computer lights, 1–32 Channels each.
- Memorizing capacity of 48 chase, up to 100 steps each chase, The stay time and cross parameter can be set to each step.
- Data can be saved after powering off.
- Knob can be adjusted for different time. X/Y can be control smoothly.
- Green switch power supply installed internally with high performance and the harmonic distortion with low power supply and big applicable scope of voltage is suitable for all the power supply in the world.
- Connector: XLR–D3F2.
- 12V goosen eck lights can be applied.
- N.W:7.12kg G.W:9.5kg
- Item Size:62.5×45.5×12cm Packing Size:70×54×20cm

GUODA LIGHTING AND AUDIO EQUIPMENT GUODA®